

IMMERSION RTD'S

TEMPERATURE RANGE: -58°F to 500°F (-50°C to 260°C)

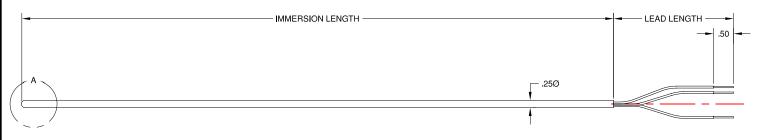




These RTD's are ideal when the immersion length is undetermined until actual time of installation.

As spare elements, they also provide the advantage of stocking the longest length only in a desired quantity to be used as a replacement in any of the shorter assemblies. This offers economy and constant availability.

To reduce the length for a particular installation, simply remove the TEFLON® insert from the lead wire end of the tube. Then cut the tube with a tube cutter to avoid damaging the wires or deforming the tube. Once the tube is cut, remove burrs and reinsert the TEFLON® insert.

Adjustable RTD's are available from stock in standard 28.5" immersion and 6" lead length.

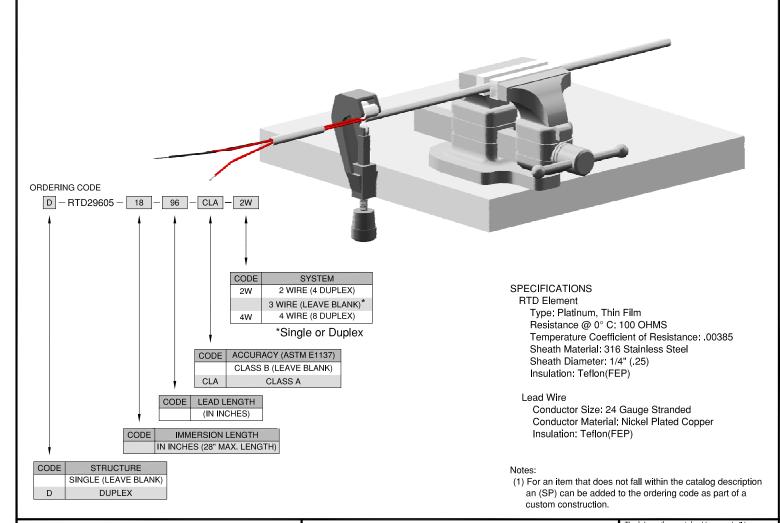



SECTION IMRD

The information contained hereon shall be considered the sole property of Thermo Electric Company, Inc. The reciplent thereof agrees not to disclose or reproduce sald information to partles outside the recipients organization without the written permission of Thermo Electric.

FIELD ADJUSTABLE RTD,S SINGLE & DUPLEX CONSTRUCTION

Doc. No.: TE-CO010109-IMRD-130

TEMPERATURE MEASUREMENT DESIGNER'S GUIDE WWW.THERMO-ELECTRIC-DIRECT.COM