
INDUSTRIAL THERMOCOUPLES

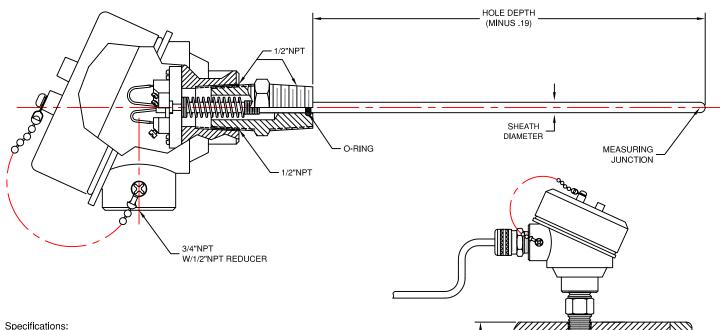

HOLE DEPTH


Specifications:

- (1) Fitting Material: Stainless Steel.
- (2) O-Ring: BUNA-N.
- (3) Service Temperature: 250° F(120° C), Intermitting to 300 °F(150° C).

Notes:

- (1) Meets or exceeds Special Initial Calibration Tolerances per ANSI MC96.1-1982 and ASTM E230-1993
- (2) KKS & EES denotes stabilized thermocouple and special tolerance.
- (3) Contact factory for other calibration and sheath combinations.
- (4) Rated NEC class 1, Groups B, C and D.
- (5) ATEX approved EEx d IIC, T6.
- (6) For an item that does not fall within the catalog description an (SP) can be added to the ordering code as part of a custom construction.

ORDERING CODE:

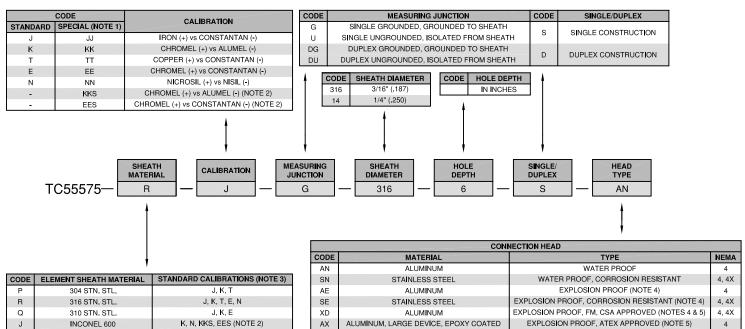



SECTION INTC

OIL SEAL THERMOCOUPLES

The information contained hereon shall be considered the sole property of Thermo Electric Company, Inc. The recipient thereof agrees not to disclose or reproduce said information to parties outside the recipients organization without the written permission of Thermo Electric.

Doc. No.: TE-CO010109-INTC-170