# THERMOWELLS

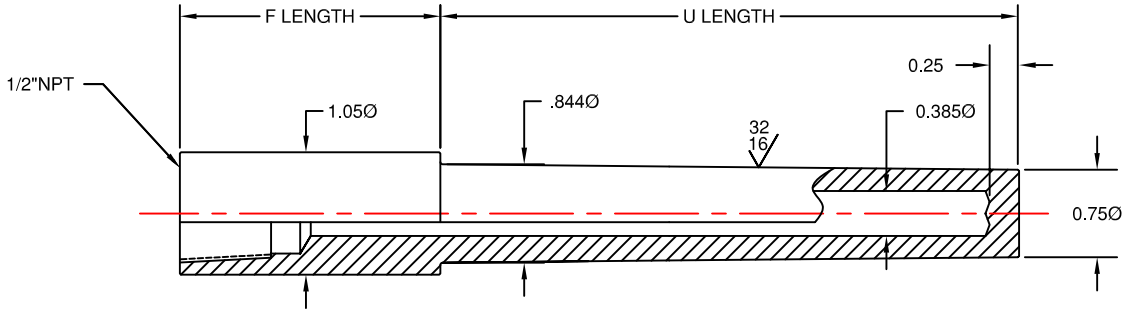


**TYPE 01**

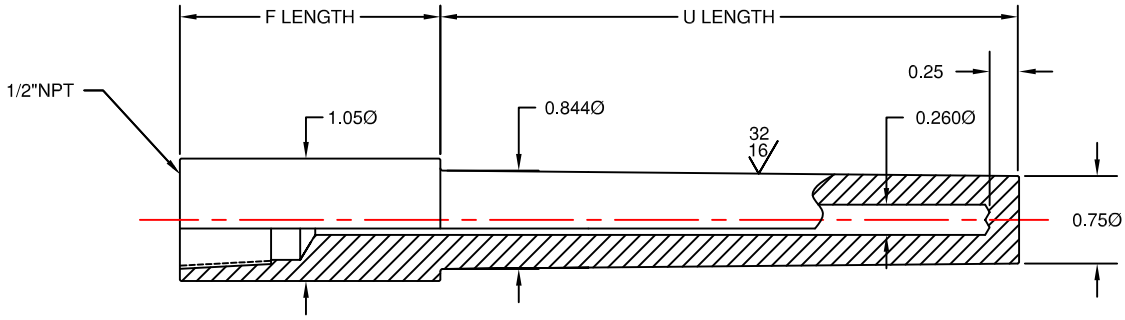


**TYPE 011**

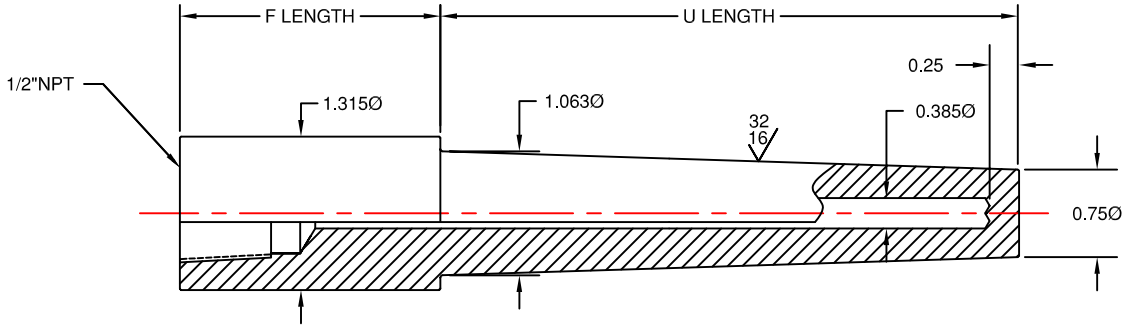


**TYPE 02**

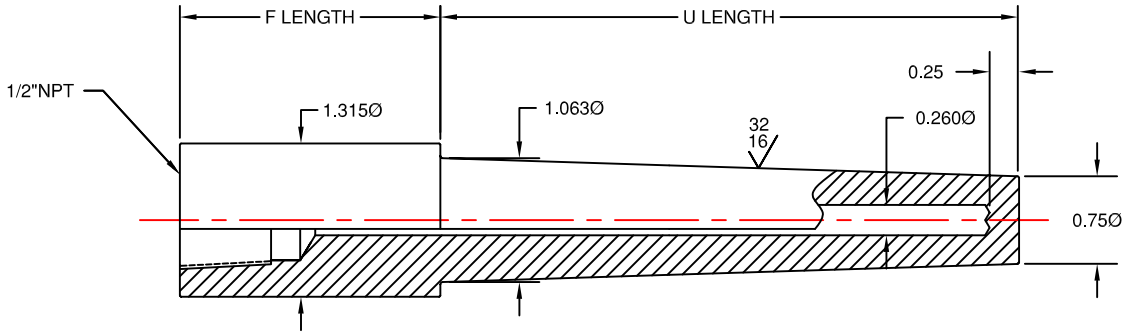


**TYPE 021**

STANDARD TOLERANCES

U LENGTH
12" or Less ±.063
12" or Over ±.13
F LENGTH
±.25
STEM DIAMETER
±.015
BORE DIAMETER
+.005/-.003
END THICKNESS
±.063

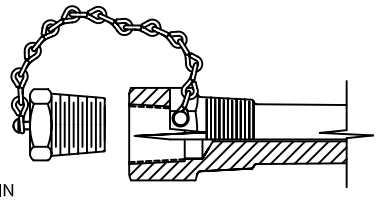

PLUG & CHAIN
Prevent foreign matter from entering test wells when not in use. Plugs are available in Brass or Stainless Steel. A captive chain is attached to prevent loss.
To order as a test well specify plug & chain code letters after well ordering code.

| CODE | PLUG & CHAIN |
|---|---|
| -BPC | BRASS |
| -SSPC | STN. STL. |

ORDERING CODE

TW [ ][ ][ ] – [ ]

| CODE | THERMOWELL TYPE |
|---|---|
| | (INSERT WELL TYPE) |

| CODE | WELL MATERIAL |
|---|---|
| P | 304 STN. STL. |
| R | 316 STN. STL. |
| PLorRL | 304 or 316L STN. STL. |
| (F11) | 1.25% CR. - .5 MO. |
| N | CARBON STEEL |

| CODE | F LENGTH |
|---|---|
| | (IN INCHES) |

| CODE | U LENGTH |
|---|---|
| | (IN INCHES) |

THERMO ELECTRIC

TEMPERATURE MEASUREMENT DESIGNER'S GUIDE
WWW.THERMO-ELECTRIC-DIRECT.COM

## SECTION TWPT

## DRILLED SOCKET THERMOWELLS

The information contained hereon shall be considered the sole property of Thermo Electric Company, Inc. The recipient thereof agrees not to disclose or reproduce said information to parties outside the recipients organization without the written permission of Thermo Electric.

Doc. No.: TE-CO010109-TWPT-010